


WSC058-A

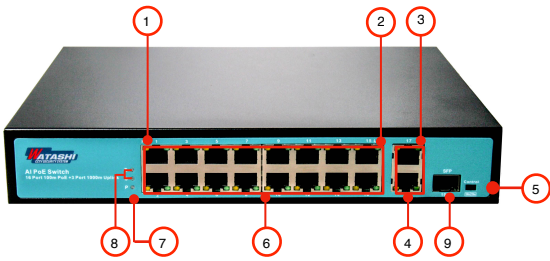


- 1 PoE status indicator 2 Network uplink indicator 3 Network downlink indicator
- 4 Network uplink port 5 Function control switch 6 1-16port PoE power supply
- 7 Power indicator 8 Function indicator:E - Extend S - Fiber uplink
- 9 Fiber uplink ports

Features

- *Main Function: Provide 16x10/100 Base-T Ethernet ports(PoE) , 2x1000M Base-T Ethernet Port 1SFPx1000M Base-T ports
- *Compliance with standards: IEEE802.3 ,IEEE802.3u, IEEE802.3ab, IEEE802.3z, IEEE802.3X, IEEE802.3 af/at
- *PoE Power Display : Support 16 LED digital tube display machine PoE power usage. whole machine reaches 300W PoE power output
- *One-key Smart: Support three kinds of working modes (100m, VLAN, 250m)
- *Safeguard: short circuit, broken circuit, over-voltage, over-current, under-voltage, surge
- *Operating temperature: -40°C ~ 55°C (-40~+131F)

Application

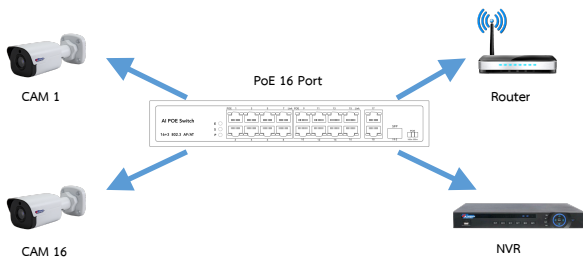

16port100M+3port1000M standard AI Smart POE Switch (AC220V)		
Technical Parameters	Standard	IEEE 802.3 af/at use for Power-over-Ethernet
		IEEE 802.3 use for 10BaseT
		IEEE 802.3u use for 100BaseT(X)
		IEEE 802.3ab use for 1000BaseT(X)
		IEEE 802.3x flow control
interface	RJ45 POE Port	16 10/100BaseT(X)Support SPOE transmission and data communication
	RJ45 Uplink	2 100/1000MBaseT(X)Support data communication
	SFP Uplink	1 1000MBaseT(X)Support optical data communication
SPOE Corresponding to the foot	Default	V+, V+, V-, V- Corresponding to the foot1236 (Endspan) AF/AT
	Optional power supply	V+, V+, V-, V- Corresponding to the foot4578(Midspan)AT/AT
POE Feature	compatible PD	1236 power stander PD、 4578 power standard PD and non-standard PD (OPTIONAL)
	Safeguard	short circuit、 broken circuit、 overvoltage、 overcurrent、 undervoltage、 surge
	Power protection mechanism	power on pin 1-16 orderly to prevent a boot failure caused by peak voltage
	steady power supply Mode	mean port 1-16 POE voltage, stable supply voltage
	AI Smart POE Mode	45+ 78- (Support standard 48V PD @ non-standard 48V PD @PC etc equipment used simultaneously)
	POE Mode	12+ 36- (Support standard 48V PD @PC etc equipment used simultaneously)
Indicator light	LED	P System Power、 E Extend、 S Fiber、 Link、 PoE
Button switch	Default	EXTEND OF: PoE 100M/ON: PoE 250M
Network characteristics	Network characteristics	1-16port10M250M/100M100M @17-18port100M 19port 100KM (offer different optical fiber module)
	bandwidth	16G (Non-blocking high-speed data exchange)
	Network delay	Maximum no more than 20 milliseconds(100 to 100Mbps)
	Packet forwarding rate	11M
	Address database	4K
	Forwarding mode	Store and forward
	Forwarding rate	10BASE-T: 14880pps/port 100BASE-TX: 148800pps/port 1000BASE-TX: 1488000pps/port
	MAC address	Automatic learning
Power supply	flow control	Full duplex IEEE802.3xFlow Control ; BackpressureHalf - duplex back pressure flow control
	Bit error rate	<1/1000000000
	input voltage	AC220V build-in power
	input power	DC48V/300W @IEEE802.3AF/@IEEE802.3AT
	Port output power	15.4W @IEEE802.3AF/25W @IEEE802.3AT
	power distance	250M (non- shield lane) turn on EXTEND
mechanical properties	Housing	Iron shell、 IP30 Protection class
	Dimension	270(L)x203(W)x46(H)
	Installation method	Desktop installation / wall mounting/ Bracket (optional)
working environment	Operating temperature	-40 ~ 55°C (-40 ~ +131F)
	Storage temperature	-40 ~ 75 °C (-68 ~ + 199F)
	Relative humidity	5% ~ 95% (No condensation)
Trouble-free period	MTBF	An average of 100,000 hours trouble-free time to work

