




Dimension Unit : mm

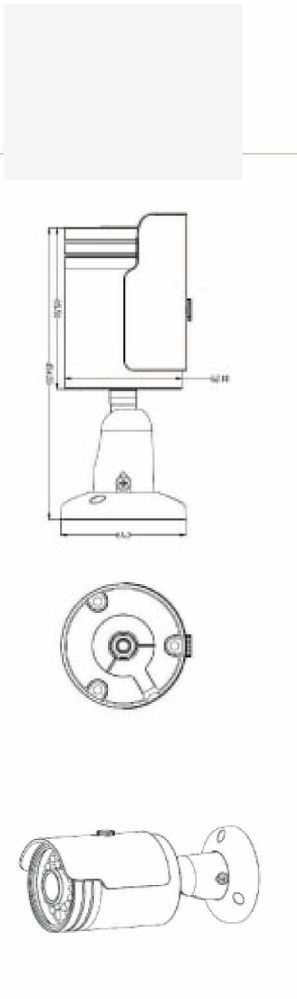

### Software

- 2MP (1920x1080@30fps)
- 3D DNR / D-WDR
- ROI coding
- Stabilization Lens setting
- Support P2P, FujikoDDNS
- System Compatibility Onvif
- Color setup brightness, contrast, Saturation, Hue Sharpness
- Heartbeat mechanism, One-key reset, password protection, privacy mask watermark technology

### Hardware Specification

- 1/2.7" HD 2.0MP CMOS, ICR
- Built-in IR Cut Removable.
- Aluminum Alloy Housing for Better Heat Dissipation.
- DC12V
- Class IP66 Weatherproof.
- 18 φ5mm SMD LEDS up to 40m IR distance

## Specifications

Model	KP-IPC911A
Compression method	H.264/MJPEG video compression
Image Sensor	1/2.7" HD 2.0MP CMOS, ICR
Image Pixels	1920x1080P
Resolution	1920*1080, 1280*960, 1280x720@30fps
Triple streaming	S1: 1920*1080, 1280*960, 1280x720@30fps S2: 640*480,640*360,352x288@30fps S3: 320x240,160x122@30fps
Bit Rate	16Kbps ~ 8Mbps
Stream transmission	CBR / VBR
LAN Port	Ethernet (10/100Base-T), RJ45 connector
Protocol	Static,TCP/IP, ICMP, HTTP, HTTPS, FTP, DHCP, DNS, DDNS, RTP, RTSP, RTCP, PPPoE, NTP, UPnP, SMTP, SNMP, P2P
Web Browser	Microsoft Internet Explorer 8.0 or above, Mozillar firefox
Storage	N/A
Alarm	Motion detection, Video blocking, Network disconnection , IP conflict,Access Violation, Storage exception, Video format mismatch
Electronic Shutter	Auto 1/25 ~ 1/100,000 sec.
Min. Illumination	0.01Lux@F1.6(Color,0 Lux (IR LED ON)
IR Distance	40M
IR Cut Removable	Yes
PoE	N/A
Lens Type	f3.6mm (Min. focus range 4mm)
Audio Input/Output	N/A
Power Source	DC12V±10% /1.5A
Operating Temperature	-10°C~50°C,10% ~90% humidity
Dimension	220x120x105mm
Weatherproof	IP66