

ProID RS485 Series Reader



ProID20-RS



ProID30-RS

The ProID-RS family of card readers is designed to offer card technologies options to customers such as 125KHz EM, 13.56MHz MIFARE, DESFire.

With a robust all-weather protection and a beautiful modern design, the ProID-RS family is the best choice for indoor or outdoor applications.

Features

- High stability and energy efficiency.
- LED light and touch keypad.
- RS485 output.
- Waterproof design suitable for indoor or outdoor applications.
- Black or white color available.

Specifications

Read Range

≥5cm

Reading Time

≤300ms

Input Port

External LED Control
External Buzzer Control

Material

ABS+PC

Supported Panel

InBio160 Pro, InBio260 Pro
InBio460 Pro

Output Format

RS485

Power

Operating Voltage 7~13V DC
Current Draw < 80mA

LED

Pulsing White Standby Light
Red and Green LEDs

Operating Temperature

-20 °C ~ 65 °C

Operating Humidity

10% ~ 90% Relative Humidity
Non-Condensing

Audio

Beep

Index Protection

IP65

Dimensions


ProID20/30-RS: 90 × 90 ×
16mm.

ProID RS-485 Reader List

| | | | | |
|---------------|---------------|---------------|---------------|---------------|
| ProID20 BE-RS | ProID20 BM-RS | ProID20 WE-RS | ProID20 WM-RS | ProID20 BD-RS |
| ProID20 WD-RS | ProID30 BE-RS | ProID30 BM-RS | ProID30 WE-RS | ProID30 WM-RS |

How to Order ProID Series?

ProID20 WE - RS

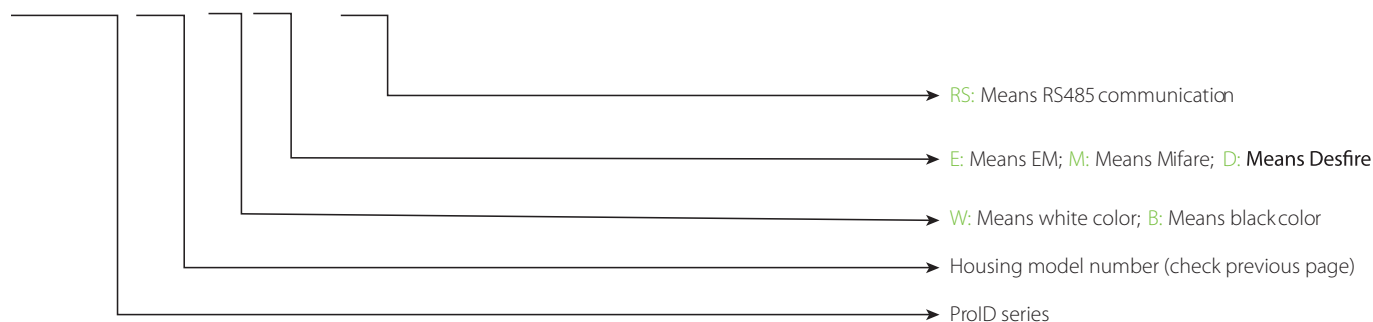

ZKTECO CO.,LTD.
E-mail: sales@zkteco.com
www.zkteco.com

© Copyright 2017, ZKTECO CO.,LTD. ZKTeco Logo is a registered trademark of ZKTeco or a related company. All other product and company names mentioned are used for identification purposes only and may be the trademarks of their respective owners. All specifications are subject to change without notice. All rights reserved.

