




Key features

- 1.0 Megapixel high-performance CMOS
- TurboHD output, up to 720P resolution
- True Day/Night
- DNR, Smart IR
- Up to 20m IR distance
- IP66 weatherproof

Dimensions

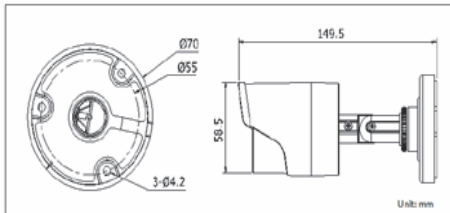

Accessories



Video balun
DG-1H18

Available models

JM-B16C0TIRP

JM-B16C0TIRP	
Camera	
Image sensor	1MP CMOS image Sensor
Effective Pixels	1280(H)*720(V)
Min. illumination	0.01 lux @(F1.2,AGC ON), 0 Lux with IR
Shutter time	1/25(1/30)s to 1/50,000s
Lens	3.6mm(Angle of view: 71°) , 6mm(Angle of view: 57°)
Lens Mount	M12
Angle Adjustment	Pan: 0° - 360°, Tilt: 0° - 90°, Rotation: 0° - 360°
Day & Night	ICR
Synchronization	Internal synchronization
Video Frame Rate	720p@25fps/720p@30fps
HD Video Output	1 Turbo HD output
General	
Working Temperature/ Humidity	-40 °C - 60 °C (-40 °F - 140 °F) Humidity 90% or less (non-condensing)
Power Supply	12V DC
Power Consumption	Max. 4W
Weather Proof Ratings	IP66
IR Range	Up to 20m
Dimension	Φ 70×149.5 mm (Φ 2.76" ×5.89")
Weight(approx.)	290g (0.64 lb)