

**EL-810P** 

#### **Features**


**EL-810P** is a large door contact, about 1 ½" size. Suitable for most security system.

- Ruthenium Over Gold Reeds
- UL approved PVC Lead Out wire

## **Specification**

- Maximum Contact Rating :- 100VDC 0.5A 10W
- Wide Gap : 1 1/4" ( 31 mm ) Wide Gap Closed Loop
- Weather Resistant Rating IP65
- Dimension : (50 L x 10 W x 10 D) mm
- Safety Approval:- CE
- ISO 9000 certified Manufacturer
- Cable Spec : Length 300mm, 22AWG, UL1007 Standard

### **User Guide: Product Dimension**

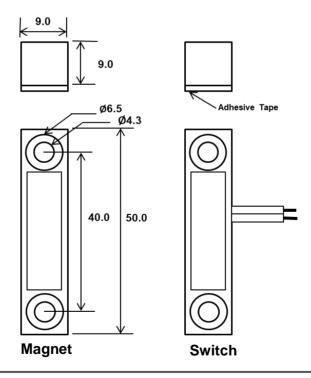




Kyodensha Technologies (M) Sdn Bhd (2057536-M) Digit Innovation Technologies (M) Sdn Bhd (646972-U)


No. 12A Jalan PPU3A, Pusat Teknologi Sinar Puchong 47150 Puchong Selangor, Malaysia TEL +603-8066 4636 +603-8051 5788 FAX +603-8051 4919 WEB www.elock2u.net EMAIL enquiry@elock2u.net

#### Installation Instruction:

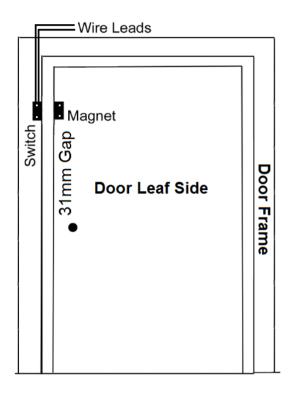

- Place the switch (with wire) on door frame, mark the mounting position and fix the screw in door frame to mount the switch
- Place the magnet on door leaf, mark the mounting position and fix the screw in door leaf to mount the magnet
- Make sure maximum gap is 31mm between switch and magnet
- 4. Connect the wire leads from reed switch to panel
- Designed for use with steel, wood and other door and window materials

# Surface Mount





Kyodensha Technologies (M) Sdn Bhd (2057536-M) Digit Innovation Technologies (M) Sdn Bhd (646972-U)