

EL-820P

Features

EL-820P Commercial Metal Contact offers high quality door contact with high grade magnet and designed in miniature size which eases for installation.

- Miniature size for easy installation
- Cast aluminum casing for harsh environments
- Ruthenium Over Gold Reeds
- UL approved PVC Lead Out wire
- Safety Approval:- CE
- ISO 9001 Certified Manufacturer
- IP Rating : IP65

Specification


- Maximum Contact Rating :- 100VDC 0.5A 10W
- Wide Gap: 1 1/2" (38 mm)



Dimension : (51 L x 19 W x 9.5 D) mm2" L x 3/4" W x 3/8" D

Cable Spec : Length 270mm, 22AWG, UL1007 Standard


User Guide: Product Dimension





Kyodensha Technologies (M) Sdn Bhd (2057536-M) Digit Innovation Technologies (M) Sdn Bhd (646972-U)

Installation Instruction:

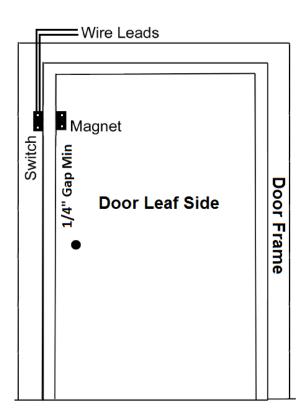

- Place the switch (with wire) on door frame, mark the mounting position and fix the screw in door frame to mount the switch
- Place the magnet on door leaf, mark the mounting position and fix the screw in door leaf to mount the magnet
- Make sure min gap is ¼ inch between switch and magnet
- 4. Connect the wire leads from switch into alarm circuit
- 5. Designed for use with steel, wood and other door and window materials

